


## 1-Line , Transient Voltage Suppressor For ESD Protection

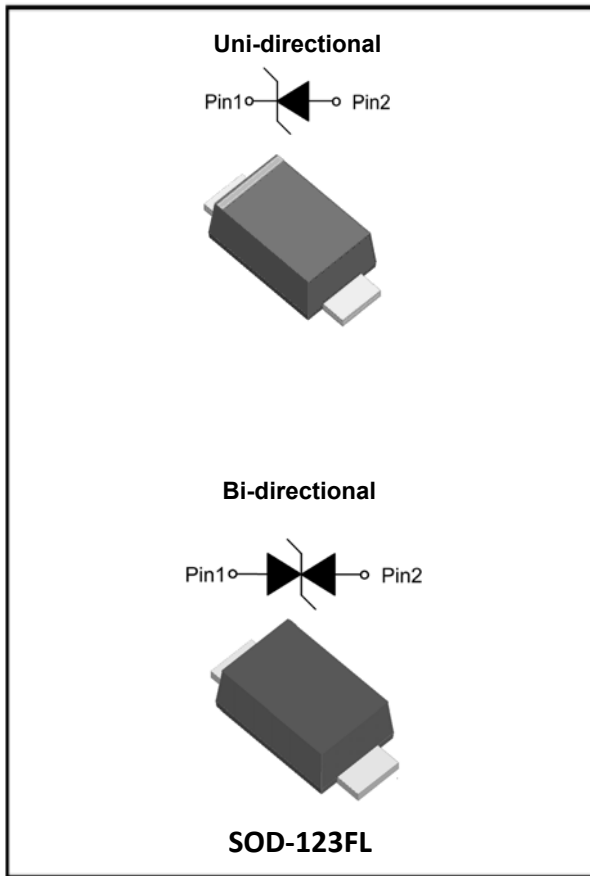

### Features


- Ultra small package
  - Stand-off voltage: 5V ~36V
- Transient protection for each line according to
  - IEC61000-4-2(ESD):  $\pm 30\text{kV}$  (contact)
  - IEC61000-4-4 (EFT): 80A (5/50ns)
  - IEC61000-4-5(surge) :
    - $8/20\mu\text{s}$  waveform:  $I_{PPM}$  see Table 4
- Low clamping voltage
- RoHS Compliant

### Applications

- Power supply protection
- Power management
- Battery Contacts


### Mechanical Characteristics

- Package: SOD-123FL
- Case Material: "Green" Molding Compound.
- Moisture Sensitivity: Level 1 per J-STD-020
- Marking Information: See Below

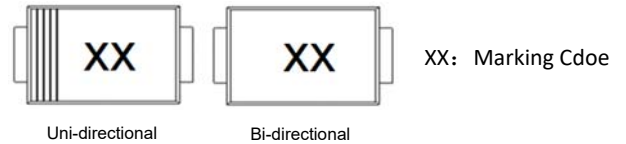

For uni-directional types the band denotes cathode end, no marking on bi-directional types

### ■Definitions of electrical characteristics

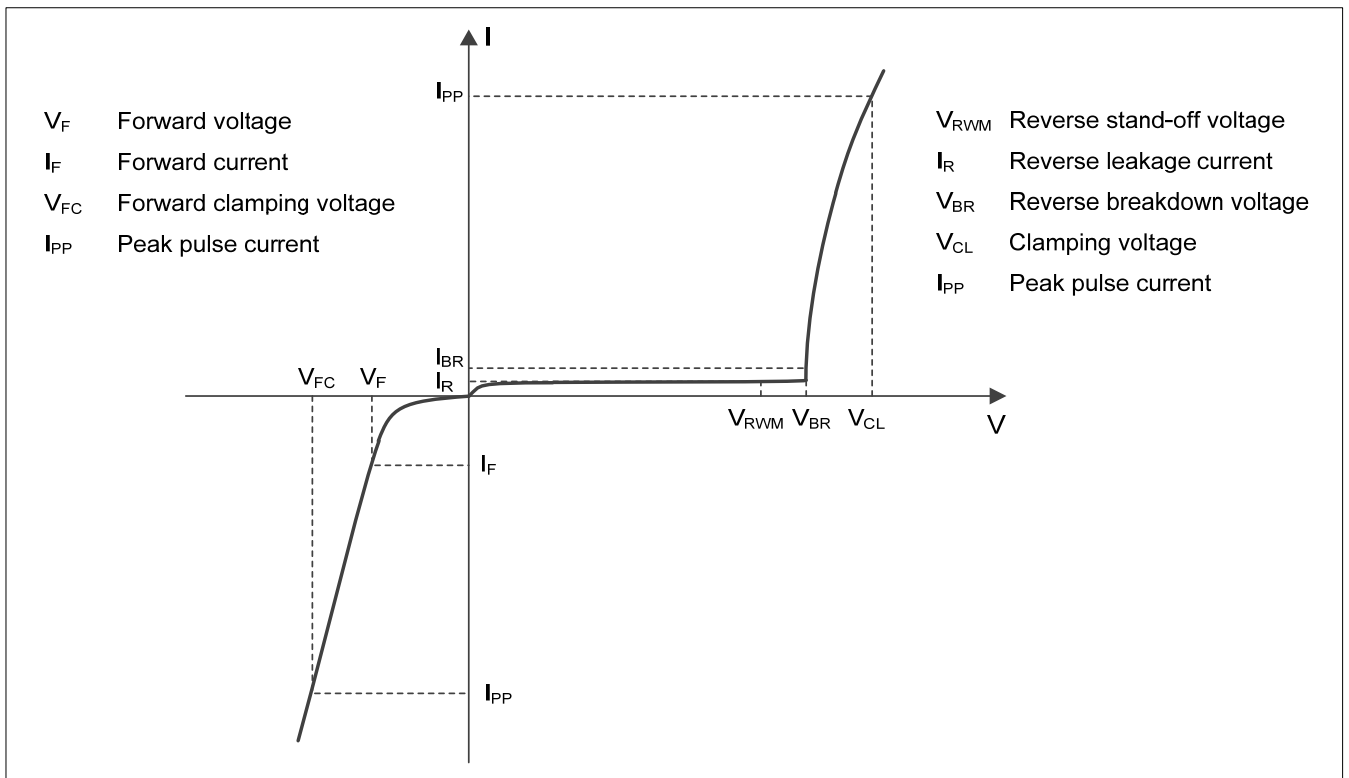



# ESDXXF1 SERIES

## ■Absolute Maximum Ratings (Ta=25°C unless otherwise specified)

PARAMETER	SYMBOL	VALUE	UNIT
Peak pulse power ( $t_p = 8/20\mu s$ )	$P_{pk}$	1300	W
ESD IEC61000-4-2(ESD)Air	$V_{ESD}$	$\pm 30$	KV
ESD IEC61000-4-2(ESD)Contact		$\pm 30$	KV
Operating Temperature Range	$T_J$	-55~150	°C
Storage Temperature Range	$T_{STG}$	-55~150	°C

## ■Electrical Characteristics (Ta=25°C Unless otherwise specified)

### Uni-directional

Part Number	Marking Code	Reverse Working Voltage $V_{RWM}(V)$	Breakdown Voltage $V_{BR}(V)@I_T$			Reverse Leakage Current $I_R(\mu A)@V_{RWM}$	Forward Voltage $V_F(V)@I_F=10mA$		Junction Capacitance $C_j(pF)@VR=0V, f=1MHz$	
		Max	Min	Max	$I_T$ mA	Max	Min	Max	Typ	Max
ESD5V0F1	05	5	6.4	7.1	10	400	0.45	1.5	1600	2000
ESD7V0F1	07	7	7.7	8.7	1	100	0.45	1.5	900	1200
ESD12VF1	12	12	13.2	15	1	2.5	0.45	1.5	600	900
ESD15VF1	15	15	16.5	19	1	1	0.45	1.5	450	700
ESD18VF1	18	18	20.0	23	1	1	0.45	1.5	400	600
ESD24VF1	24	24	26.7	30	1	1	0.45	1.5	270	400
ESD36VF1	36	36	40	45	1	1	0.45	1.5	200	300

### Bi-directional

Part Number	Marking Code	Reverse Working Voltage $V_{RWM}(V)$	Breakdown Voltage $V_{BR}(V)@I_T$			Reverse Leakage Current $I_R(\mu A)@V_{RWM}$	Junction Capacitance $C_j(pF)@VR=0V, f=1MHz$	
		Max	Min	Max	$I_T$ mA	Max	Typ	Max
ESD5V0F1B	5B	5	6.4	7.1	10	400	850	1200
ESD7V0F1B	7B	7	7.7	8.7	1	100	700	900
ESD12VF1B	12B	12	13.2	15	1	2.5	400	600
ESD15VF1B	15B	15	16.5	19	1	1	250	400
ESD18VF1B	18B	18	20.0	23	1	1	170	250
ESD24VF1B	24B	24	26.7	30	1	1	160	240
ESD36VF1B	36B	36	40	45	1	1	100	160



# ESDXXF1 SERIES

Part Number		Rated peak pulse current IPP (A) <sup>1)</sup>	Clamping voltage VCL(V) @ IPP (A) <sup>1)</sup>	
Uni	Bi	Max	Typ	Max
ESD5V0F1	ESD5V0F1B	105	-	12
ESD7V0F1	ESD7V0F1B	85	-	16
ESD12VF1	ESD12VF1B	50	-	26
ESD15VF1	ESD15VF1B	40	-	32
ESD18VF1	ESD18VF1B	35	-	38
ESD24VF1	ESD24VF1B	25	-	51
ESD36VF1	ESD36VF1B	17	-	75

Notes:

(1). Non-repetitive current pulse, according to IEC61000-4-5. (8/20 $\mu$ s current waveform).

## ■ Typical Performance Characteristics (T<sub>a</sub>=25°C unless otherwise Specified)

Fig.1 8/20 $\mu$ s waveform per IEC61000-4-5

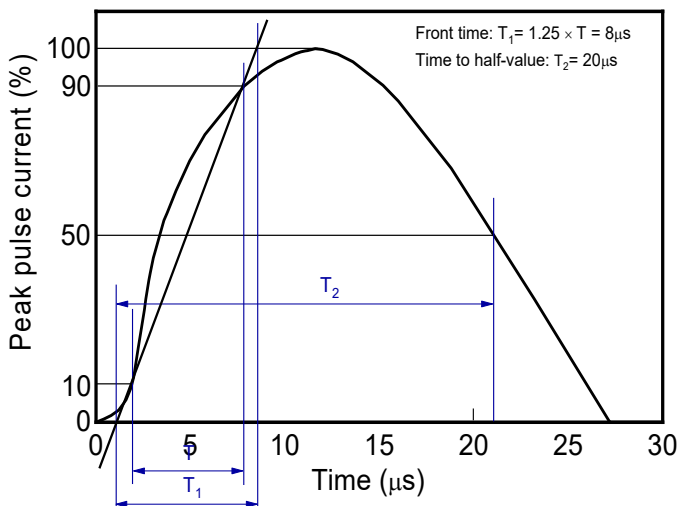


Fig.3 Non-repetitive peak pulse power vs. Pulse time

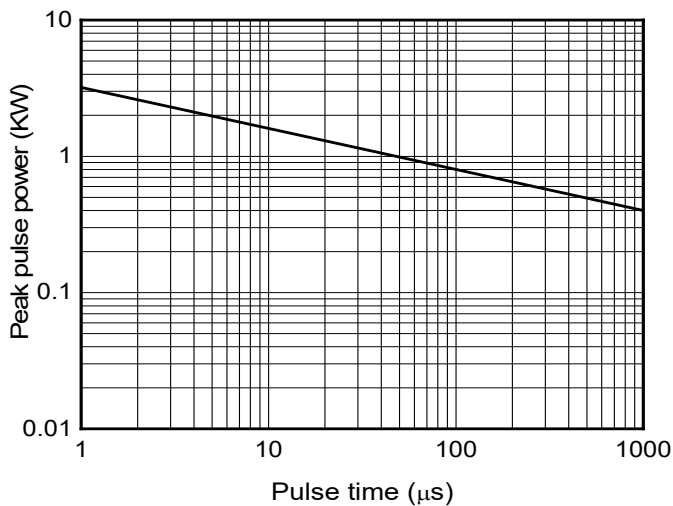


Fig.2 Contact discharge current waveform per IEC61000-4-2


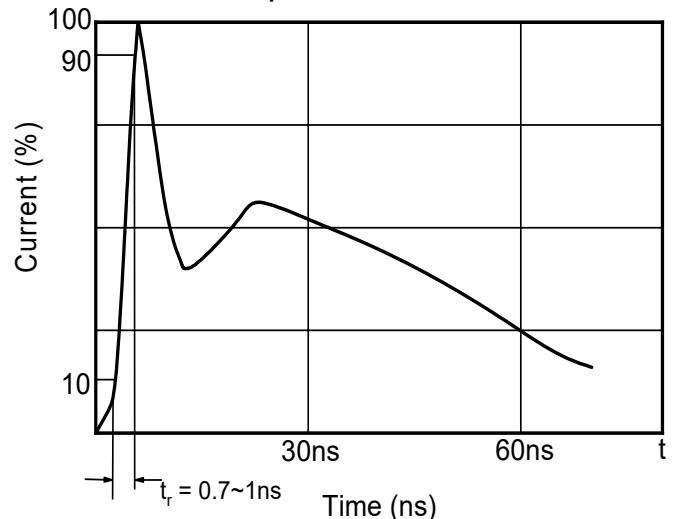



Fig.6 Power derating vs. Ambient temperature



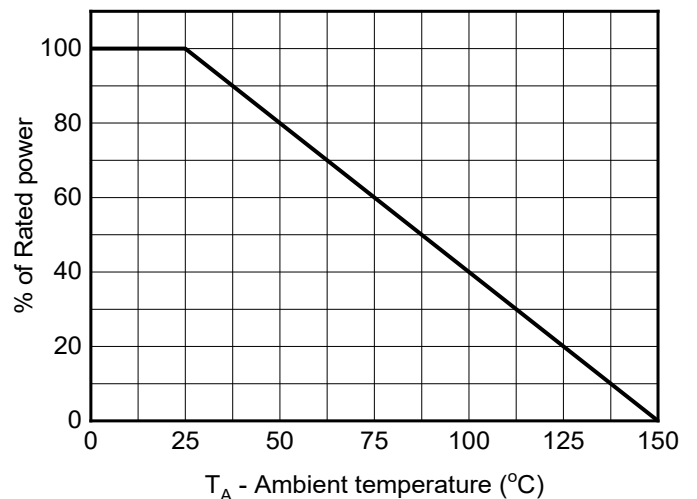


## ESDXXF1 SERIES

### ■Outline Dimensions

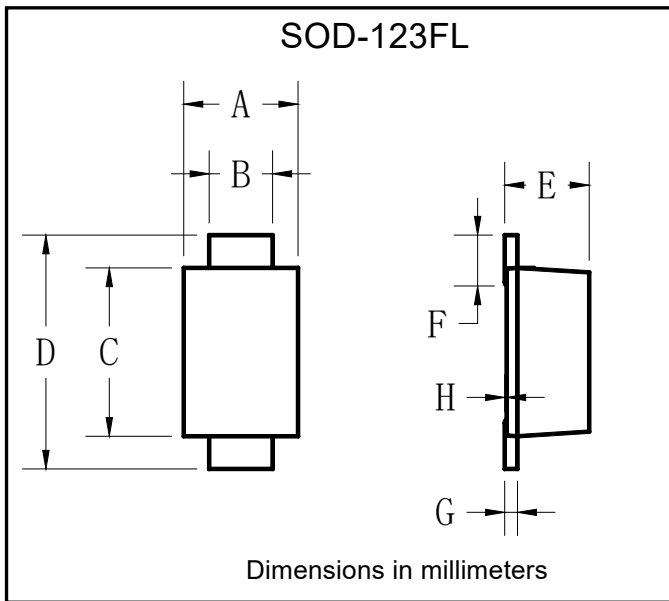

SOD-123FL		
Dim	Min	Max
A	1.60	1.90
B	0.90	1.10
C	2.55	2.85
D	3.60	3.90
E	1.00	1.20
F	0.40	0.90
G	0.10	0.25
H	0.02	0.05

### ■Recommend land pattern (Unit:mm)

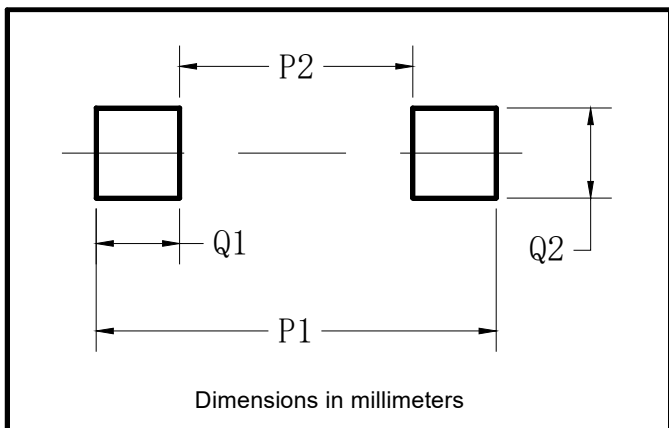

SOD-123FL	
Dim	Millimeters
P1	3.90
P2	1.90
Q1	1.00
Q2	1.50

#### Notes:

This recommended land pattern is for reference purposes only. Please consult your manufacturing group to ensure your PCB design guidelines are met.



## ESDXXF1 SERIES

---

### Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.